


Single Row/Double Row Straight Solder Tail

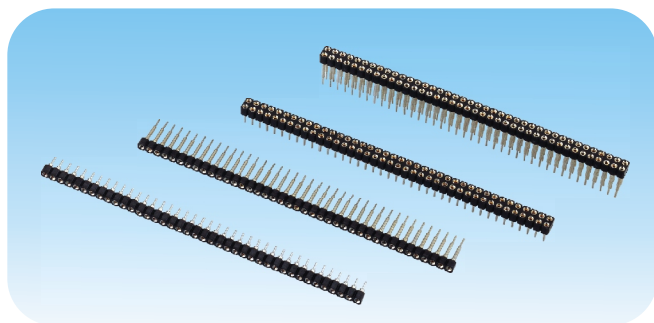

Socket Connectors 2.54mm : SBD

SPECIFICATIONS:

Insulator:	PPS
Flammability:	UL 94V-0
Sleeve:	Brass
Contact clip (4 finger):	Beryllium copper
Mating pin ϕ :	0.40 to 0.56 mm
Forces:	(polished steel gauge ϕ 0.43mm)
-Insertion	2 N typ.
-Withdrawal	1 N typ.
Mechanical life:	min 500 cycles
Rated current:	3 A
Contact resistance:	max 10 m Ω
Dielectric strength:	min 1000V RMS

code	Pin Height H
XXXXXX	
1780A	14.6mm
1220A	9mm

P.C.B LAYOUT

SBDXX041XXXXXXA

Straight socket connector length 3.2mm:solder tail,single row

Availability from: 1 to 40 contacts

Standard number of contacts 5, 6, 8, 9, 10, 11, 12, 14, 16, 17, 20, 25, 30, 32 and 40

code	Pin Height H
XXXXXX	
1780A	14.6mm
1220A	9mm

P.C.B LAYOUT

SBDXX242XXXXXXA

Straight socket connector length 3.2mm:solder tail,double row

Availability from: 2 to 80 contacts

Standard number of contacts 20, 56, 60 and 72

code	Pin Height H
XXXXXX	
0920A	6mm
1020A	7mm
1120A	8mm
1220A	9mm
1340A	10mm
1420A	11mm
1520A	12mm

P.C.B LAYOUT

SBDXX041XXXXXXA

Interconnect socket strip:solder tail, single row

Availability from: 1 to 40 contacts

Standard number of contacts 5, 6, 8, 9, 10, 11, 12, 14, 16, 17, 20, 25, 30, 32 and 40

code	Pin Height H
XXXXXX	
0920A	6mm
1020A	7mm
1120A	8mm
1220A	9mm
1340A	10mm
1420A	11mm
1520A	12mm

P.C.B LAYOUT

SBDXX242XXXXXXA

Interconnect socket strip:solder tail, double row

Availability from: 2 to 80 contacts

Standard number of contacts 20, 56, 60 and 72

XX	X	XX	X	X	X	X	X	XXXXX
Pitch(mm) SA 2.54 Male SB 2.54 Female SC 2.00 Male SD 2.00 Female SE 1.778 Male SF 1.778 Female SG 1.27 Male SH 1.27 Female	Angel Options D Straight R Right Angle S SMT	No. of Positions XX Positions	Dip spcing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	Insulator Height 0 No 1 1.90 mm 2 2.00 mm 3 2.80 mm 4 3.00 mm 5 4.20 mm 6 7.00 mm S Special	Insulator Type 0 No 1 Single Row 2 Double Row 3 Open frme 4 W/O Bar S Special	Pin Plated 0 No 1 Tin150 μ " 2 Tin200 μ " 3 G/F 4 Gold3 μ " 5 Gold10 μ " 6 Gold15 μ " S Special	Clip Plated 0 No 1 Tin150 μ " 2 Tin200 μ " 3 G/F 4 Gold3 μ " 5 Gold10 μ " 6 Gold15 μ " S Special	Pin length Options 0920A 9.20mm 1020A 10.20mm 1120A 11.20mm 1220A 12.20mm 1340A 13.40mm 1420A 14.20mm 1520A 15.20mm 1780A 17.80mm S Special