




Single Row/Double Row Straight/Right Angle Solder Tail

Pin Connectors 2.0mm : SCD/SCR

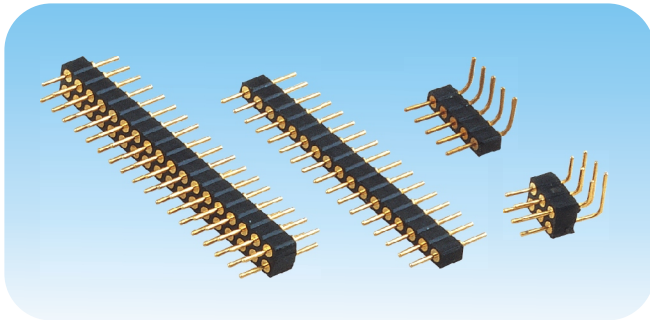



SPECIFICATIONS:

Insulator:	PPS
Flammability:	UL 94V-0
Sleeve:	Brass
Mating pinφ:	0.47 mm
Mechanical life:	min 500 cycles
Rated current:	3 A
Contact resistance:	max 10 mΩ
Dielectric strength:	min 1000V RMS

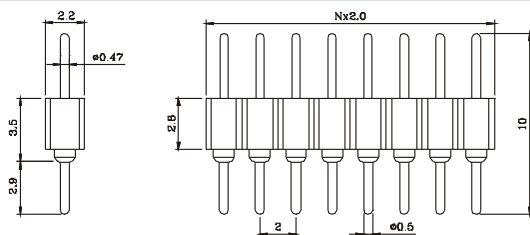



SCDXX031XX1000A

Straight pin connector:solder tail,
single row
Availability from:2 to 40 contacts
Standard number of contacts 40

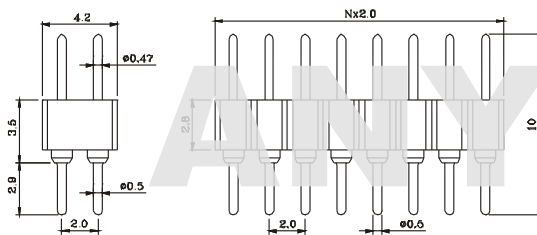



SCDXXS32XX1000A

Straight pin connector:solder tail,
double row
Availability from:4 to 80 contacts
Standard number of contacts 40

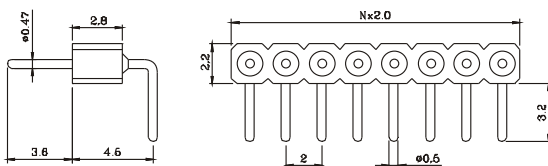

SCRXX031XX1220A

Right angle pin connector solder tail,
single row
Availability from:2 to 40 contacts
Standard number of contacts 40

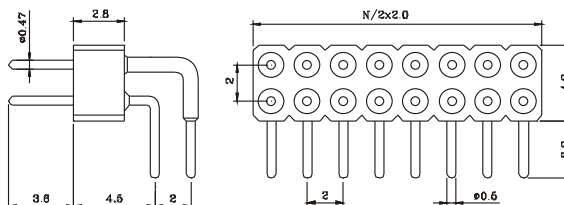

SCRXXS32XX1220A

Right angle pin connector solder tail,
double row
Availability from:4 to 80 contacts
Standard number of contacts 80

XX	X	XX	X	X	X	X	X	XXXXX
Pitch(mm) SA 2.54 Male SB 2.54 Female SC 2.00 Male SD 2.00 Female SE 1.778 Male SF 1.778 Female SG 1.27 Male SH 1.27 Female	Angel Options D Straight R Right Angle S SMT	No. of Positions XX Positions	Dip spcing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	Insulator Height 0 No 1 1.90 mm 2 2.00 mm 3 2.80 mm 4 3.00 mm 5 4.20 mm 6 7.00 mm S Special	Insulator Type 0 No 1 Single Row 2 Double Row 3 Open frame 4 W/O Bar S Special	Pin Plated 0 No 1 Tin150μ" 2 Tin200μ" 3 G/F 4 Gold3μ" 5 Gold10μ" 6 Gold15μ" S Special	Clip Plated 0 No 1 Tin150μ" 2 Tin200μ" 3 G/F 4 Gold3μ" 5 Gold10μ" 6 Gold15μ" S Special	Pin length Options 1000A 10.0mm 1220A 12.20mm S Special